






SPRAYING EQUIPMENT

Trailed Sprayers



NST Series

Product Description

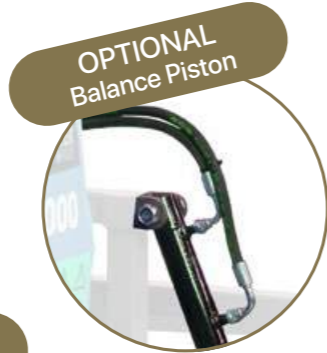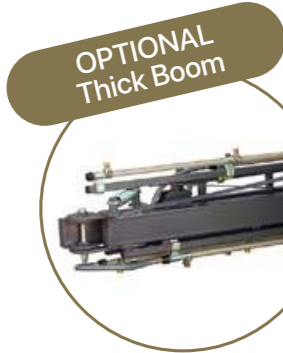

Trailed Sprayers

Technical Details

NST	1	2	3	4
Boom (Working) Width (m)	12	12-16-18	12-15-18	12-15-18
Tank Volume (L)	1000-1600-2000	1000-1600-2000	1000-1600-2000	1000-1600-2000
Tank Type	Fiberglass	Fiberglass Polyurethane	Fiberglass Polyurethane	Fiberglass Polyurethane
Boom Horizontal Movement	Manual	Manual	Hydraulic(Horizontal)	Hydraulic (Vertical)
Boom Vertical Movement	Fixed	Hydraulic	Hydraulic	Hydraulic
Boom Suspension	No	Yes	Yes	Yes
Pump Flow Rate (L/min)	80-105	105	105	105
Required Tractor Power (hp)	65	65	65	65
PTO Speed (rpm)	540	540	540	540
Clearance Type	Normal	Normal	Normal	Normal

NST	5	6	7	8
Boom (Working) Width (m)	12	12-16-18	12-15-18	12-15-18
Tank Volume (L)	1000-1600-2000	1000-1600-2000	1000-1600-2000	1000-1600-2000
Tank Type	Fiberglass	Fiberglass Polyurethane	Fiberglass Polyurethane	Fiberglass Polyurethane
Boom Horizontal Movement	Manual	Manual	Hydraulic(Horizontal)	Hydraulic (Vertical)
Boom Vertical Movement	Fixed	Hydraulic	Hydraulic	Hydraulic
Boom Suspension	No	Yes	Yes	Yes
Pump Flow Rate (L/min)	80-105	105	105	105
Required Tractor Power (hp)	65	65	65	65
Clearance Type	High	High	High	High
Extra		Tank Cleaning Unit		

Options

- 145 L/min Pump
- Pressure Filter with 2 Unit
- Pressure Filter with 4 Unit
- Thick Boom
- Promixer (Mixer From Outside of Tank)
- Foam Marker
- Balance Piston
- Traffic Kit
- Electronic Hydraulic Control Unit